
: By Interior Contractor

*/ The Rest Equipments, devices, cables, conduiments in this drawing by Shinryo Vietnam (except owner scope)

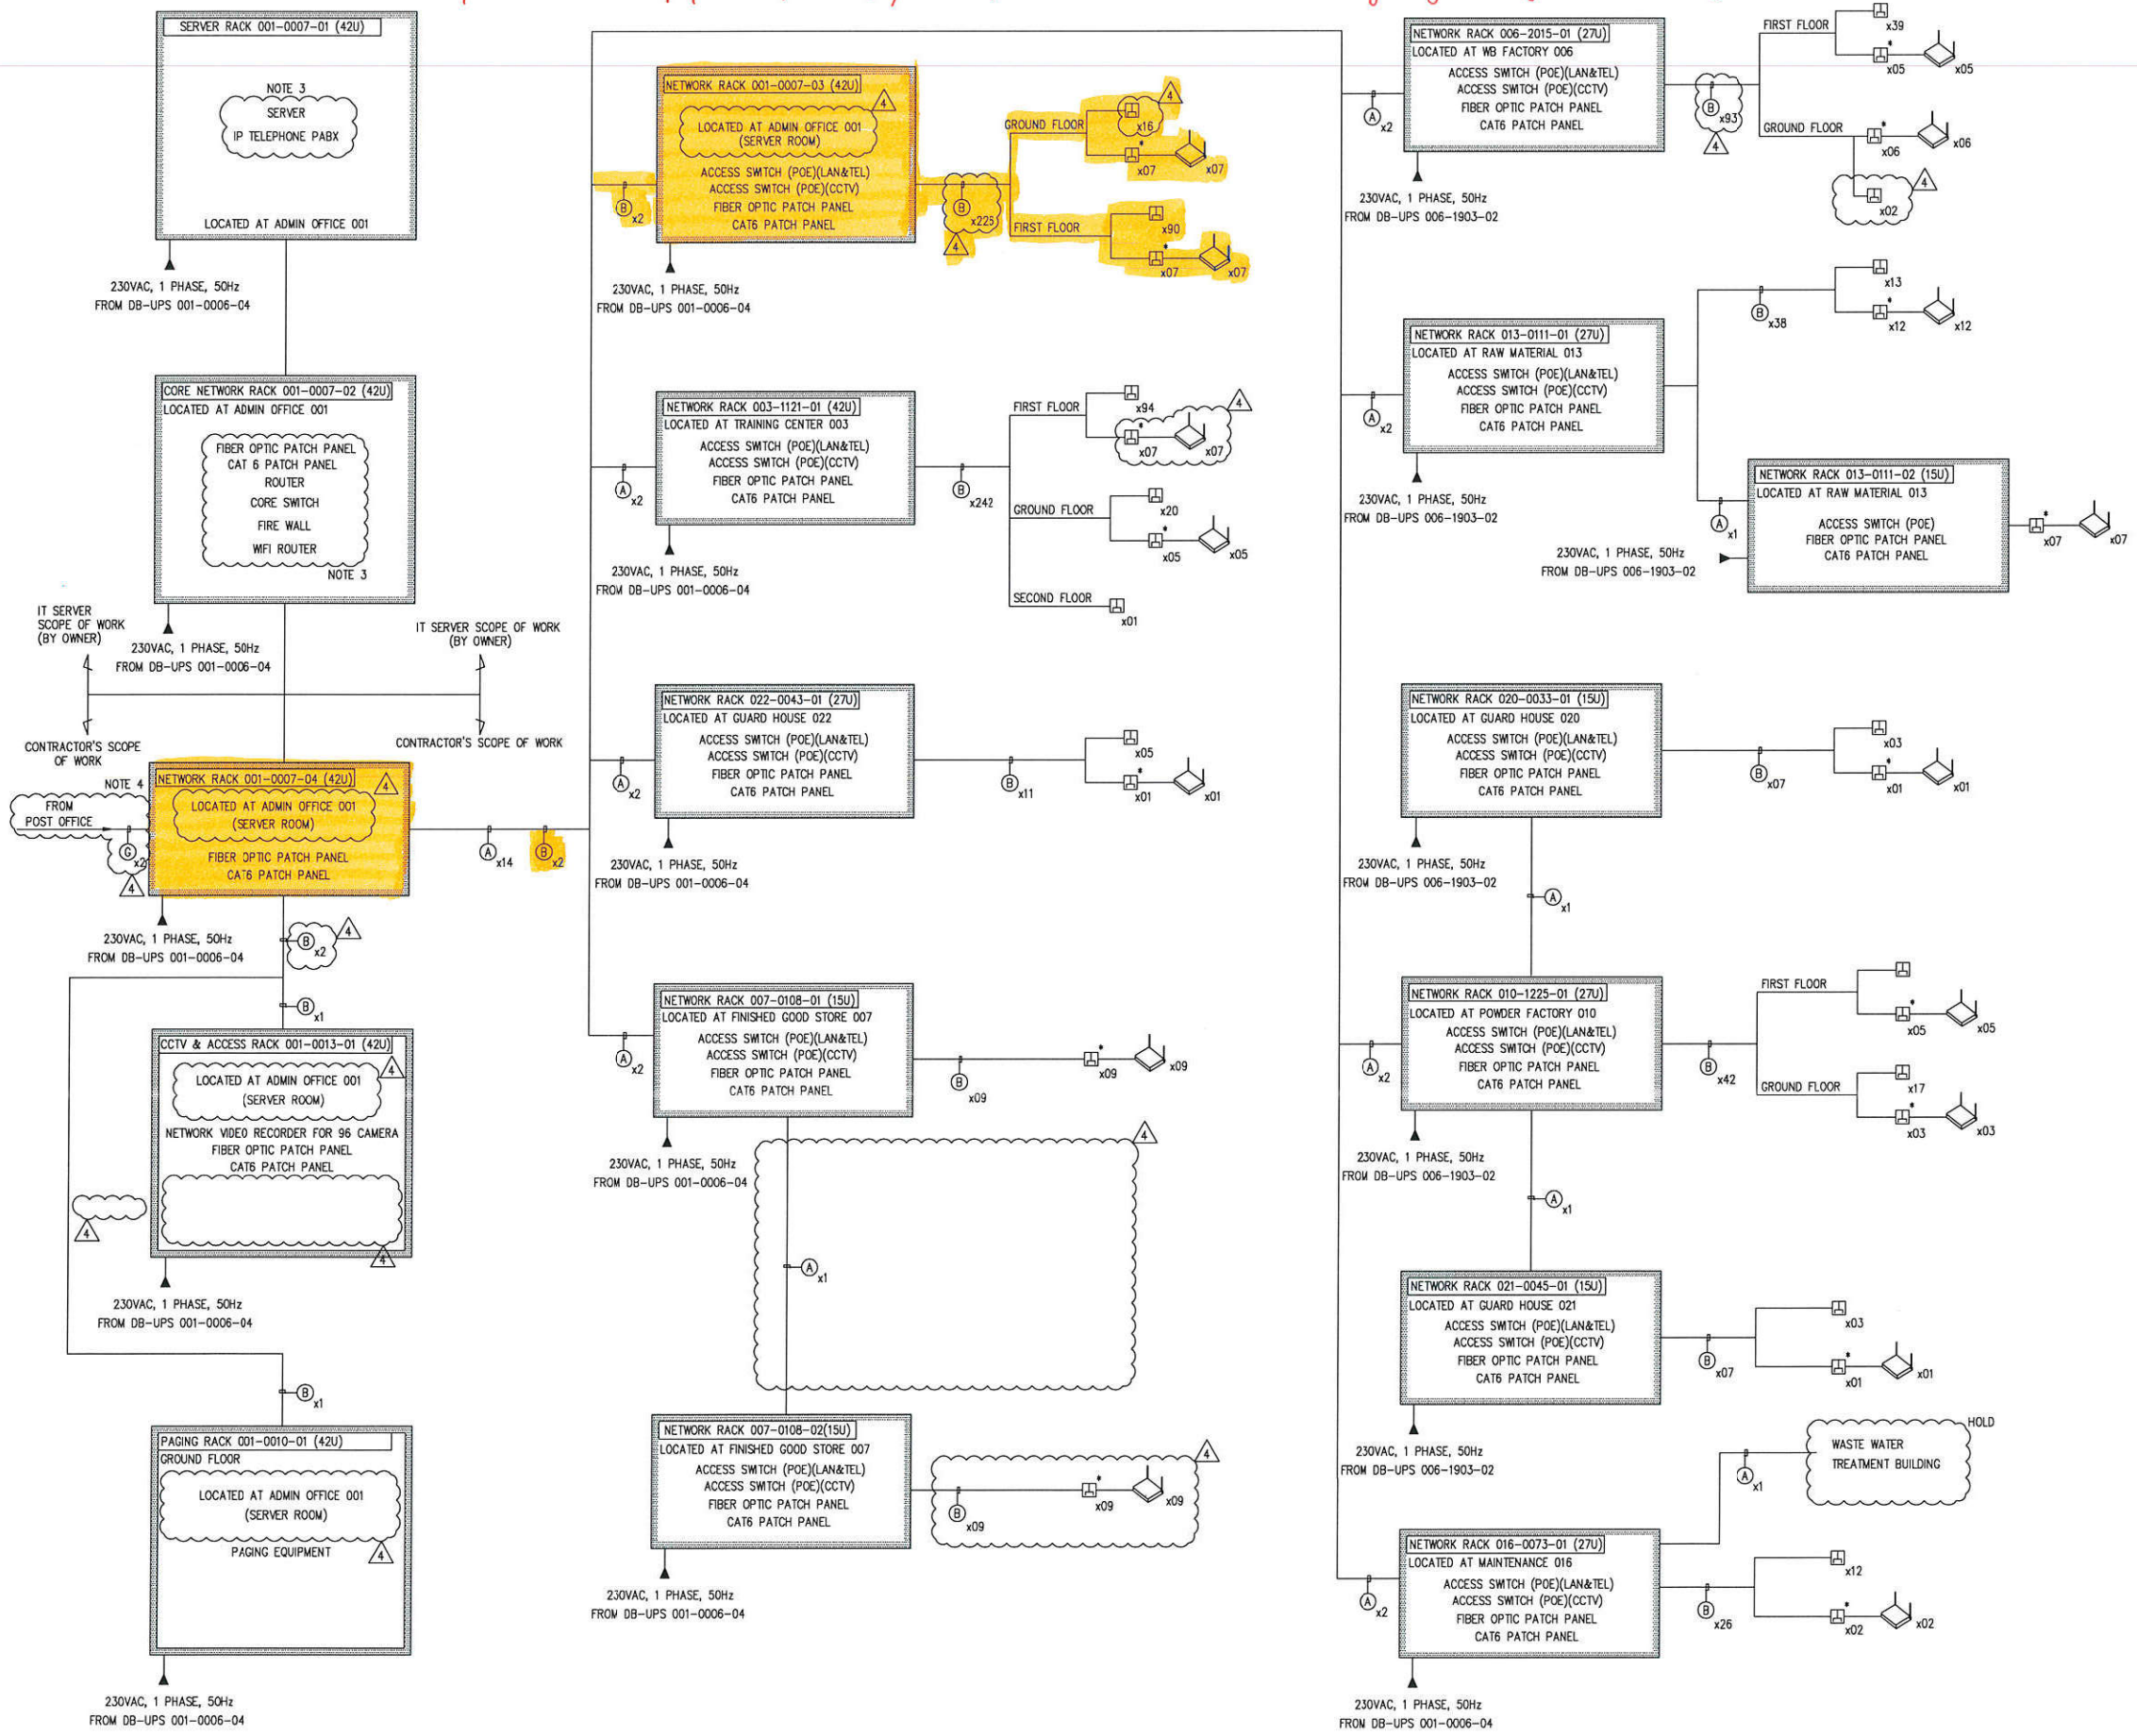

TELECOMMUNICATION SYSTEM BLOCK DIAGRAM

NOTES:

1. THIS BLOCK DIAGRAM IS INTENT TO CONFIRM THE DESIGN CONCEPTUAL OF TELECOMMUNICATION SYSTEM.
2. FIBER OPTIC CABLE SYSTEM EACH AREA IS LOOP TYPE (RING TYPE) OF COMMUNICATION SYSTEM.
3. SERVER, IP TELEPHONE PABX, ROUTER, FIREWALL, WIFI ROUTE, CORE SWITCH SHALL BE SELECTED AND SUPPLIED BY OWNER.
4. TIE-IN POINT FOR TELECOMMUNICATION SYSTEM WITH POST OFFICE SHALL BE PROVIDED BY OWNER AND MEP CONTRACTOR. 4
5. THE QUANTITY OF ACCESS SWITCH (POE), FIBER OPTIC PATCH PANEL, CAT 6 PATCH PANEL SHALL BE CONSIDER AND SELECTED BY NUMBER OF DATA OUTLETS, WIRELESS ACCESS POINTS AND CAMERAS (SEE DWG.VNHG-29780).
6. DURING CONSTRUCTION STAGE (PROCUREMENT STAGE), MEP CONTRACTOR MUST BE MADE COVERAGE CALCULATION DOCUMENT OF WIRELESS ACCESS POINT AND SUBMITTED TO OWNER TO FINALIZE FINAL LOCATION.
7. DATA OUTLET TABLE MOUNTED : SAME WITH ELEVATION OF TABLE. WITH DATA OUTLET ON TABLE MEP CONTRACTOR MUST WORK AND INTERFACE WITH FURNITURE CONTRACTOR TO FINALIZE EXACTLY LOCATION & INSTALLATION METHOD DURING CONSTRUCTION SITE. 4

SYMBOLS & LEGENDS

- DATA OUTLET (DOUBLE FACE) / NUMBER OF DATA OUTLET (DOUBLE FACE)
- DATA OUTLET (SINGLE FACE) / NUMBER OF DATA OUTLET (SINGLE FACE)
- WIRELESS ACCESS POINT (POE) / NUMBER OF WIRELESS ACCESS POINT
- (A) MULTI-MODE FIBER OPTIC CABLE (6C)
- (B) UTP CAT 6
- (C) SINGLE-MODE FIBER OPTIC CABLE (6C)

REV.	DESCRIPTION	DWN.	A/E	LE.	MGR.	PEM.	PM.	ISSUE	DATE DD/MM/YY
4 E	APPROVED FOR TENDERING -2	H.D.V.Q	T.D.N	V.V.V	L.V.B	T.T.T.T	H.D.T	F L V	27/12/19
3 D	APPROVED FOR TENDERING	T.T.N.N	T.D.N	N.D.M	L.V.B	T.T.T.T	H.D.T	F L V	09/08/19
2 C	APPROVED FOR DESIGN	T.T.N.N	T.D.N	N.D.M	L.V.B	T.T.T.T	H.D.T	F L V	22/04/19
1 B	APPROVED FOR PLANNING	T.N.L	L.T.D/ P.L.L	N.D.M	L.V.B	T.T.T.T	H.D.T	F L V	25/12/18
0 A	APPROVED FOR PLANNING	V.H	L.T.D	V.V.V	L.V.B	T.T.T.T	M.T.L	F L V	09/05/18

CONSULTANT: TVC — TTCL VIETNAM CORPORATION LIMITED

TVC JOB No. VD-156 | ACCOUNT | CUSTOMER'S ORDER No. | ISSUE MARK E | 27/12/19 DD/MM/YY

Revision	Modification	Date	Sign
–			

Year 2018 # | Design # | Drawn # | Scale plotting 1:1 | Scale 1:1 | Approved # | Version Date/ Time 2020/01/09 15:01:40

JOTUN

VNHG BLD:– LEV:–
TELEPHONE AND LAN
BLOCK DIAGRAM
–

Substitute for – | Replaced by –

VNHG-28701 #

Status WORK IN PROGRESS | Consultant TVC | Project/ Calculation no. 2017-2340 | Drawing Format A1

AMENDED: –

TOLERANCING ACCORDING TO ISO 8015
Permissible deviations for non-toleranced dimensions: MEDIUM ISO 2768-1